



CG 2040

CITY CRANE

CG 2040

Ideal for lifting and handling operations even in urban contexts.





POWERFUL

The 6.7 engine of 231 Kw, the permanent all-wheel drive and the gear guarantee the reaching of apparently inaccessible workplaces.



COMPACT

The 8.6 m length, the steering radius and the Pick & Carry mode on tires allow lifting and handling both in city and industrial areas.



FAST

The easy and ergonomic controls and the wide visibility of the cab reduce machine stabilization operations to a minimum. The independent selection of the 1st extension from the 2nd-3rd-4th offers the operator different lifting configurations.



40 t
MAX LOAD CAPACITY

32 m
MAX LIFTING HEIGHT

65 km/h
MAX SPEED

24 t
TOTAL WEIGHT

231 kW
ENGINE

The CG 2040 is a compact and powerful mobile crane suitable for different working conditions. The innovative fully adjustable horizontal suspension system, the result of 40 years of experience in the lifting field, allows the most impassable workplaces to be reached. The small dimensions make the CG 2040 the ideal vehicle for lifting and handling operations even in city contexts. The attention to the environment and the low level of emissions allow the free movement of the crane.

BOOM

TELESCOPIC BOOM

Telescopic boom in high resistance steel. 1 base element, 1 independent extension and 3 synchronized extensions.

BOOM EXTENSION CYLINDER

Single two-stage cylinder.

BOOM LENGHT

30.65 m

PICK & CARRY

Lifting up to 11.8 t.





CAB

DRIVING

Comfortable driving with height-adjustable and tilt-adjustable steering wheel. Control instruments with ergonomic and functional layout. Rear camera for safely carrying out maneuvers in confined spaces.

OPERATOR'S CAB

Cab with great visibility, comfortable and equipped with sliding windows. Front and top safety glass with wiper. Seat with integrated headrest. Wide field of vision for different working conditions. Corrosion resistant paint.

COMFORT

Air conditioning, heating and air-suspension seat. Seat belts. Ample lighting in the operator's cab. Car radio.



Steering wheel adjustable in height and tilt



Clear and intuitive instrument panel



Control joystick for operating functions



Air conditioning, heating, radio controls



Comfortable cab equipped with sliding windows



TECHNICAL FEATURES	Maximum load capacity	40	t
	Capacity	40	t
	Maximum lifting height	32	m
OPERATING SPEED	Winch speed	67/154	m/min
	Winch rope length and diameter	L 160 Ø 13	m - mm
	Boom lifting speed	55	s
	Boom extension speed	60	s
	Turret rotation speed	3	r/min
	Maximum speed	65	km/h
CRANE	Maximum slope	30	%
	Road steering radius	11.5	m
	Construction site steering radius	6.5	m
	Emissions	EU 2016/1628	
MASS	Total weight	24	t
	Weight on the 1st axle	12	t
	Weight on the 2nd axle	12	t
DIMENSIONS	Total size	8,600x2,550x3,200	mm
	Boom lenght	30.65	m
	Boom tilt	-2 +80	°

DIMENSIONS

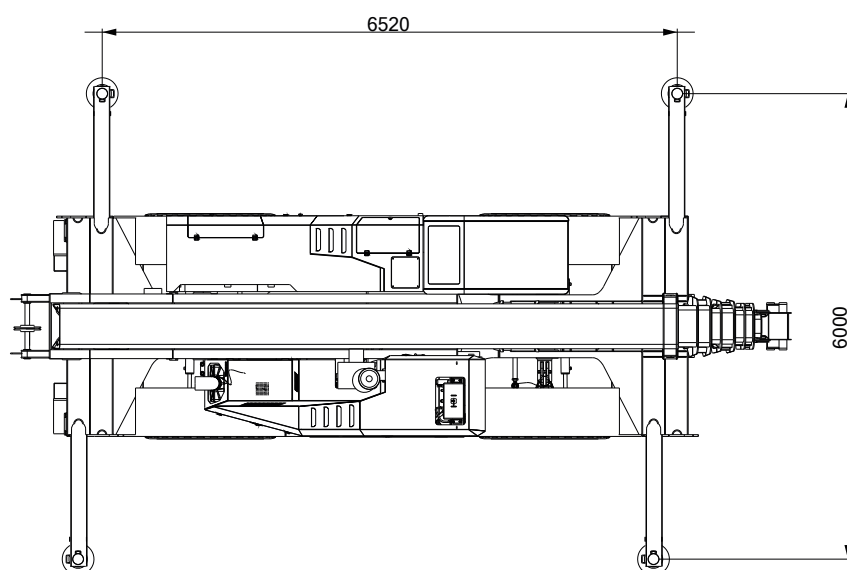

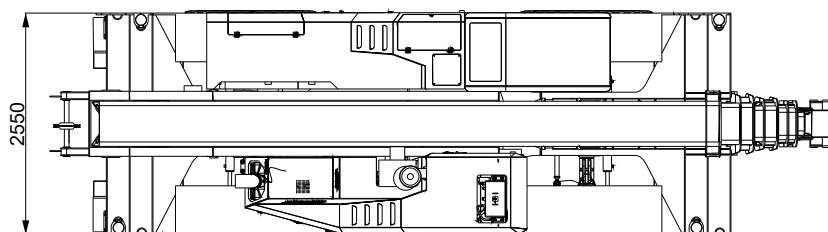

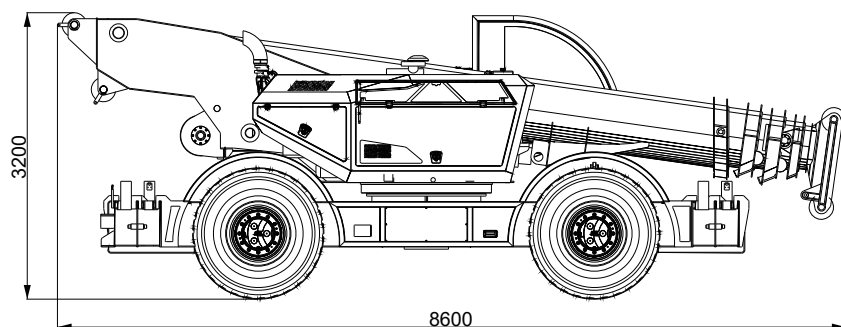


TABLE 1
CAPACITY [T]

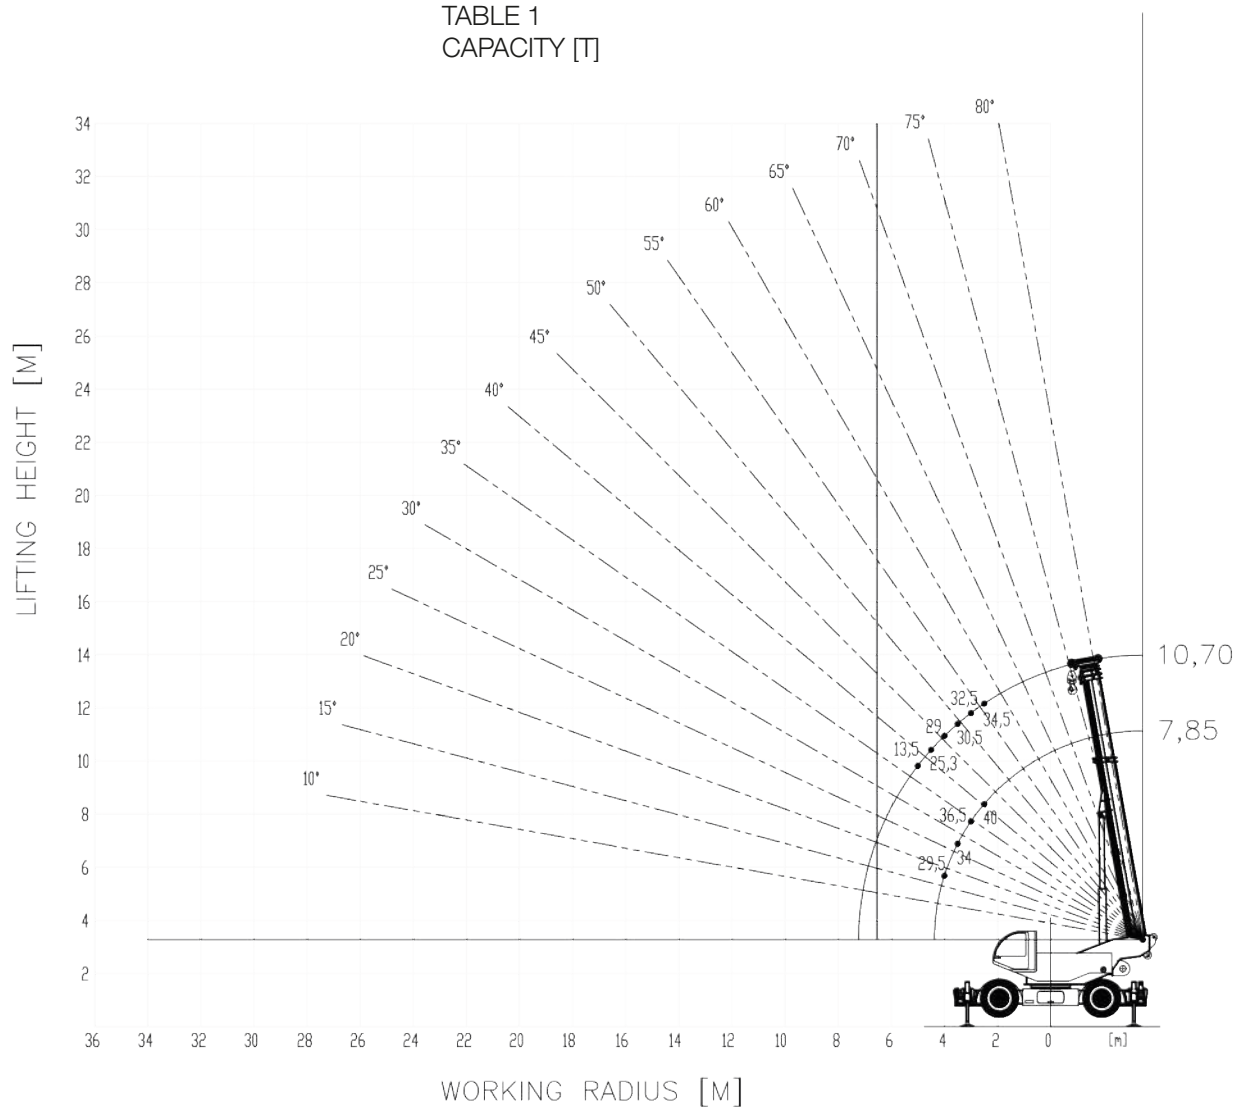


TABLE 2
CAPACITY [T]


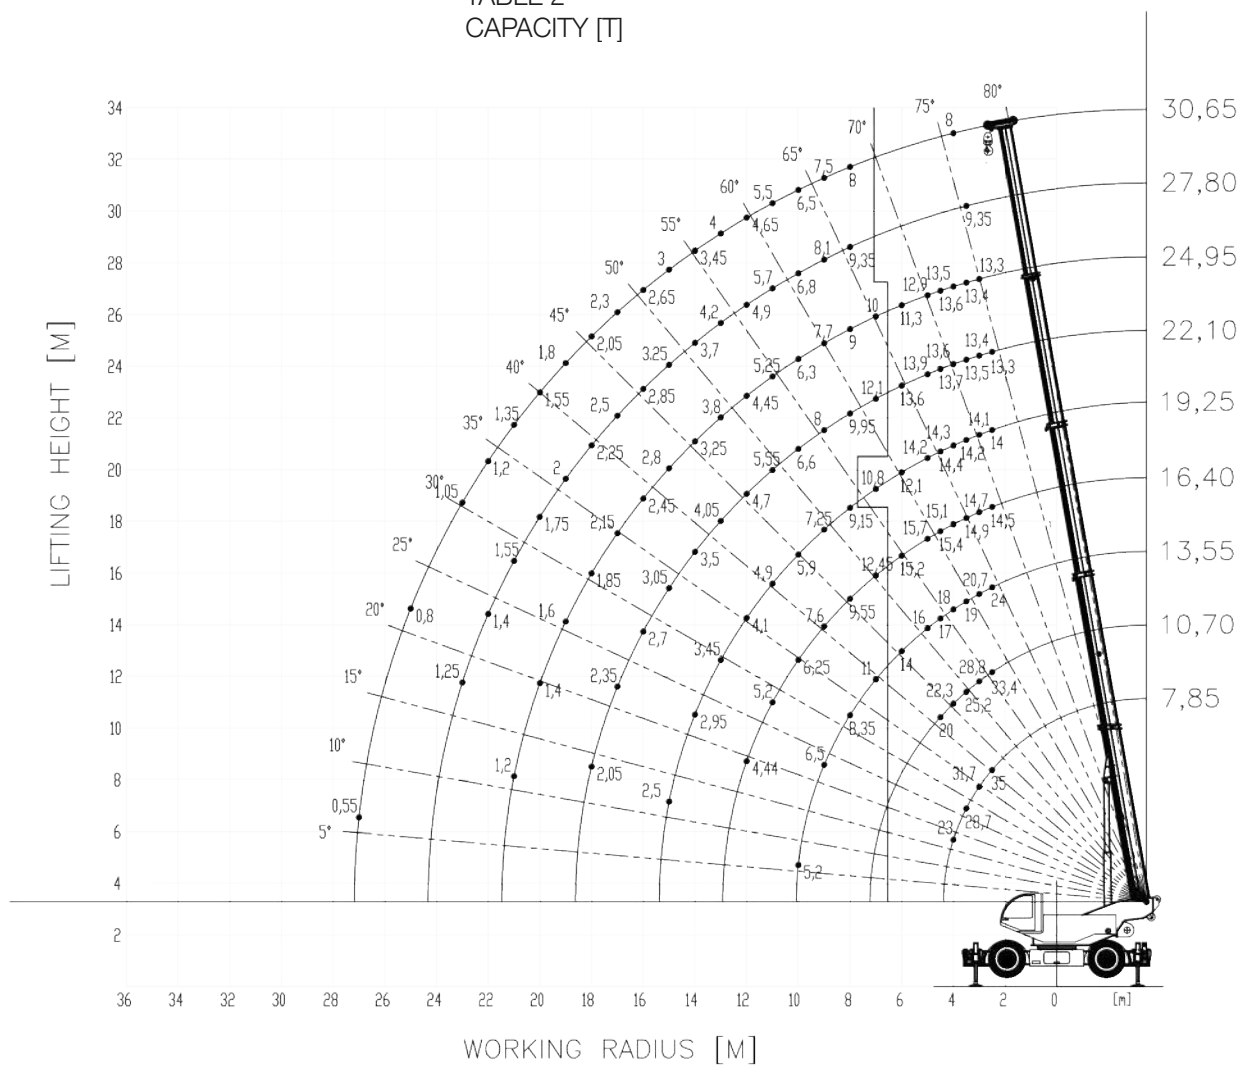


TABLE 3
CAPACITY [T]

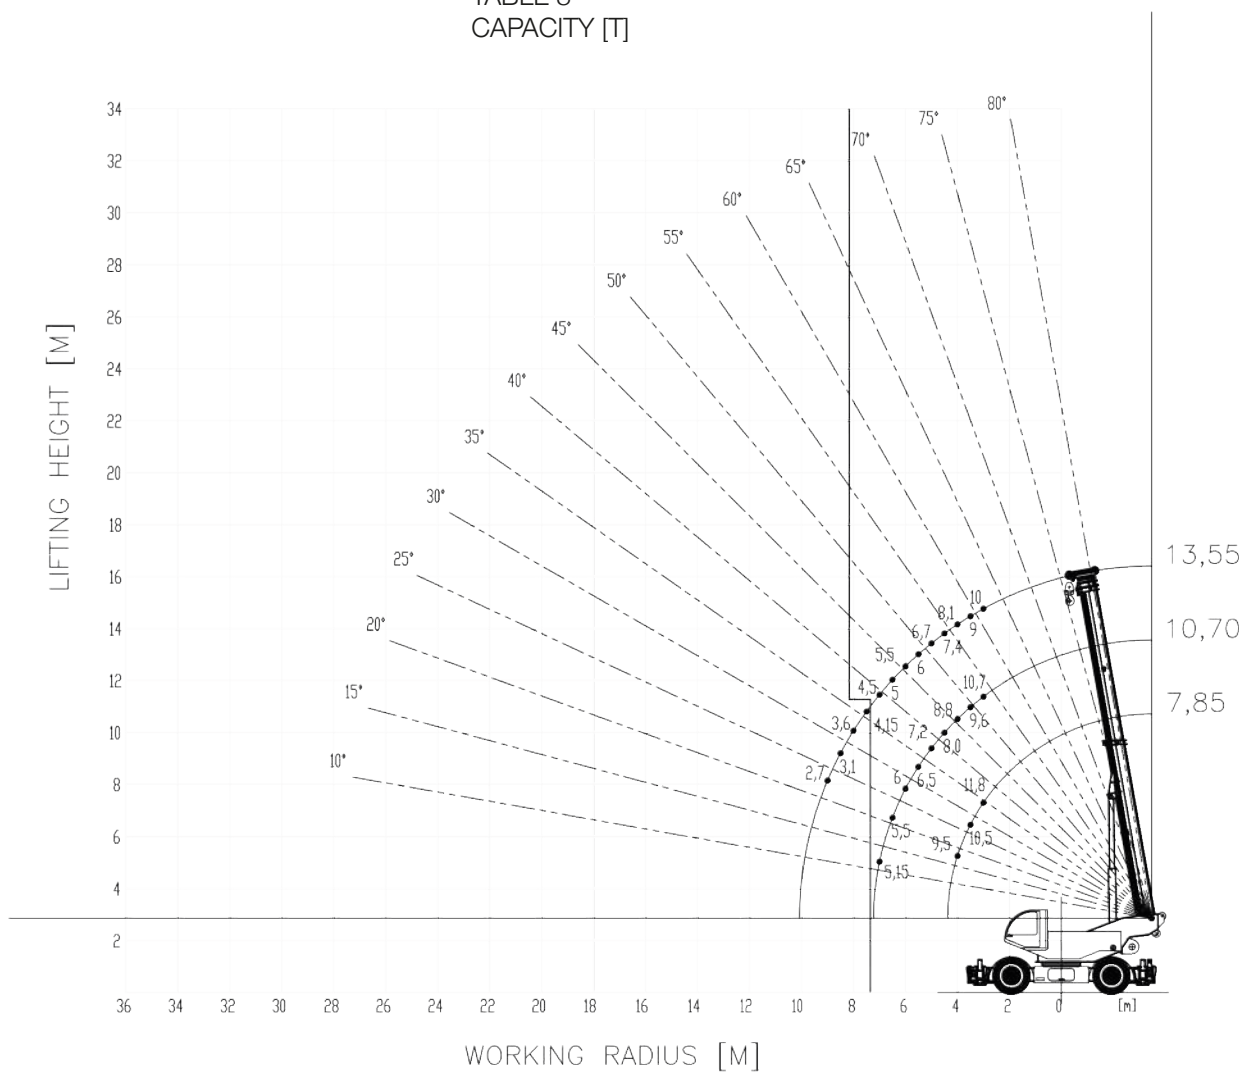

EQUIPMENT

CHASSIS

Chassis	Anti-torsion box structure in high-strength steel.
Travel	Hydraulic travel drive with TCM electronic control. A pump and two closed-circuit motors allow it to reach 65 km/h. Permanent all-wheel drive 4x4.
Electrical system	CAN Bus data transmission, 24 V.
Gear shift	Two types of selectable travel modes.
Suspensions	Innovative fully adjustable horizontal suspension system makes driving comfortable and stable. Suspensions with automatic leveling. Height adjustable according to ground conditions Δ 240mm.
Tyres	385/95 R25
Steering	Power assisted: Bosch hydraulic steering pump. 4 steering modes: road steering, all-wheel steering, crab steering, independent rear steering. 4 steering cylinders. 2 independent hydraulic circuits.
Brakes	Quick activation of the braking system. 8 pneumatically operated brake chambers ensure smooth and safe braking. ABS braking assistance system.

ENGINE

Engine	Cummins B 6.7 Stage V- Tier 4f- 231 kW@2200rpm engine.
Diesel tank	300 l
Def tank	38 l
Batteries	2 x 143 Ah

DRIVING

Driving	Comfortable driving with height-adjustable and tilt-adjustable steering wheel. Control instruments with ergonomic and functional layout. Rear camera for safely carrying out maneuvers in confined spaces.
Operator's cab	Cab with great visibility, comfortable and equipped with sliding windows. Front and top safety glass with wiper. Seat with integrated headrest. Wide field of vision for different working conditions. Corrosion resistant paint.
Comfort	Air conditioning, heating and air-suspension seat. Seat belts. Ample lighting in the operator's cab. Car radio.



TURRET

Chassis	Anti-torsion welded structure, in high-strength steel.
Rotation	Continuous 360° using axial piston hydraulic motor. Planetary gearbox with internal toothed fifth wheel and double row of balls. Multiple disc negative brake.
Control	Hydraulically operated manipulators with the possibility of simultaneous proportional maneuvers.
Lifting winch	Variable displacement axial piston engine. Lifting drum with integrated planetary gearbox and parking brake with multiple discs. Block valve and descent control. Cable gland to improve the winding of the rope on the drum.
Hydraulic system	Open circuit system with axial piston hydraulic pumps. Proportional hydraulic distributors with load sensing power regulation. Possibility of performing multiple maneuvers simultaneously. Heat exchanger for oil cooling. Oil filtering through 1 cartridge filter on the return circuit.
Hydraulic oil tank	400 l
Electrical system	24 V power supply. CAN Bus vehicle management network.
Safety devices	Electronic load limiter with indication of boom inclination, boom length, lifted load, maximum liftable load. Limit switches. Safety valves on all hydraulic functions.
Cameras	1 camera located on the rear side to increase visibility during more restricted maneuvers. 1 camera for supervising the winding of the rope on the winch.
Telescopic boom	Telescopic in high resistance steel. 1 base element, 1 independent extension and 3 synchronized extensions.
Boom extension cylinder	Single two-stage cylinder.
Boom length	30.65 m
Pick & Carry	Lifting up to 11.8 t

All data, technical characteristics and information reported in this document are for informational purposes and are subject to change without any prior notice requirement. All specifications described do not constitute a guarantee since the performance of the machine varies depending on use.

Machine illustrations may contain optional and additional equipment. The dimensional data refers to average reference measurements indicated for informational purposes only.

The commissioning of the machine and its correct use require compliance with the use and maintenance manual.

The weights of hooks, blocks and all lifting accessories are part of the load and must be deducted from the loads indicated.

Please contact TeknoGRC for more information regarding optional and additional equipment.

OUR RANGE



TK20



TK30



TK40



TK45 LS



TK35 T



CG 2040



TKC150-5

Do you need a custom crane? We make machinery on request specific to the customer's needs.
For more information, contact us at the e-mail address info@teknogrc.it



TEKNO GRC s.r.l.

Via Vecchia Fornace, 31
24050 Bariano (BG)

+39 0363 958311
info@teknogrc.it

www.teknogrc.it